

## 6-Port Outdoor L2 Lite Managed Switch GWN7710R

The GWN7710R is a 6-Port (5GE+1SFP) Outdoor Lite Managed PoE Switch that features an IP66-rated waterproof and dustproof casing to protect against harsh weather conditions, including rain, snow, and high temperatures. To ensure a stable and powerful network performance, the GWN7710R supports flexible and complex traffic segmentation with global or per port VLANs, provides DSCP/802.1p QoS priority management modes, bandwidth control, and storm control. It provides 4 Gigabit ports that provide passive PoE++ output, 1 Gigabit port with PoE++ input, and one 2.5G SFP port. The GWN7710R can be managed in a variety of ways, including locally through web user interface, through the cloud with GDMS, and on-premises with GWN Manager. This outdoor lite managed switch supports pole, DIN-rail, and wall-mounted installation to support a variety of outdoor and indoor applications. With the GWN7710R, users can build scalable, secure, high-performance, and easy-to-manage business networks for outdoor locations, hotels, restaurants, parks, campuses, public areas, and more.



**Gigabit**

5 Gigabit RJ45 ports (4 PoE output ports, 1 PoE input port)



**PoE**

IEEE 802.3 at/af or 24V/48V DC passive PoE out, Up to 60W on Port 1 and up to 30W on Port 2-4; Supports PoE Watchdog function



SFP Fiber Port for long-distance transmission



DHCP Snooping - Only allow DHCP packets from trusted ports to keep the enterprise DHCP environment safe



IP66 dustproof and waterproof rating; Wide operating temperature range: -40°C and 60°C



Supports convenient and intelligent local Web configuration, GWN Manager, and GDMS Network Management



STP/RSTP to guarantee fast convergence, ensure network stability and provide link load balance and redundancy



Built-in QoS allows for prioritization of network traffic

<b>Network Protocol</b>	IPv4, IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.1p, IEEE 802.3af, IEEE 802.3at
<b>Communication Ports</b>	<ul style="list-style-type: none"> <li>• 5x Gigabit Ethernet Ports</li> <li>• 1x 1G/2.5G SFP Port</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• 12V-57V DC input</li> <li>• Standard PoE /PoE+/PoE ++</li> </ul>
<b>PoE In and PoE Out Ports</b>	<ul style="list-style-type: none"> <li>• PoE In: Port 5;</li> <li>• PoE Out: Port 1 - Port 4</li> </ul>
<b>PoE Output</b>	<ul style="list-style-type: none"> <li>• Standard PoE output Mode (Default)</li> <li>• Passive 24VDC or 48VDC output Mode (Configured via UI)</li> </ul>
<b>PoE Output Power Budget</b>	<ul style="list-style-type: none"> <li>• Powered by Standard PoE In (802.3af/at/bt): 802.3af input: 3W output budget 802.3at input: 15W output budget 802.3bt input: 60W output budget</li> <li>• Powered by DC In (12V~57V): DC In&gt;12V: 60W output budget DC In&gt;24V: 72W output budget DC In&gt;36V: 100W output budget</li> </ul> <p><b>Note: When using the DC input, the budget of PoE output depends on the external DC input power.</b></p>
<b>Max Output Power Per Port</b>	<ul style="list-style-type: none"> <li>• Standard PoE output Mode: Port 1 - Port 4 up to 30W on each PoE port;</li> <li>• Passive PoE output Mode: Port 1: 4-pair 48V DC up to 60W or 4-pair 24V DC up to 30W Port 2 - Port 4: 2-pair 48V DC up to 30W or 2-pair 24V DC up to 15W</li> </ul> <p>* Note:</p> <ul style="list-style-type: none"> <li>•4-Pair: Powered on pins: 1,2,4,5(+),3,6,7,8(-)</li> <li>•2-Pair: Powered on pins: 4,5(+),7,8(-)</li> </ul>
<b>Auxillary Ports</b>	1x Reset Pinhole
<b>Forwarding Mode</b>	Store-and-forward
<b>Total non-blocking throughput</b>	6Gbps
<b>Switching Capability</b>	15Gbps
<b>Jumbo Frame</b>	2K/3K/4K/5K/6K/7K/8K/9K/12K/15K
<b>Forwarding Rate</b>	11.16Mpps
<b>Packet Buffer</b>	4Mb
<b>MAC</b>	8K MAC address capacity
<b>VLAN</b>	<ul style="list-style-type: none"> <li>• Supports up to 32 VLANs (Out of 4K VLAN IDs)</li> <li>• port-based VLAN, 802.1Q VLAN</li> </ul>
<b>LAG</b>	3
<b>Multicast</b>	IGMP snooping, Report Message Suppression
<b>QoS</b>	<ul style="list-style-type: none"> <li>• Auto prioritization of the incoming port of the packet</li> <li>• Supports port priority, 802.1P priority, and DSCP priority</li> <li>• Bandwidth control</li> <li>• Rate limit</li> </ul>
<b>DHCP</b>	DHCP client
<b>Maintenance</b>	Backup and restore, System reboot, Factory reset, Firmware upgrade, Support MAC address search, SNMP, LLDP Monitoring including port statistics, Port mirroring, Cable test, and Ping
<b>Security</b>	<ul style="list-style-type: none"> <li>• Storm control</li> <li>• DHCP Snooping</li> <li>• Spanning Tree</li> <li>• Loop prevention</li> <li>• PoE Watchdog</li> </ul>
<b>Mounting</b>	Pole/Wall-Mount/DIN-Rail
<b>LED Indicators</b>	<ul style="list-style-type: none"> <li>• Per device System on : Green</li> <li>• Per Ethernet port Link/Activity: Green;</li> <li>• Per Passive PoE out port 48VDC: Orange</li> <li>• Per Passive PoE out port 24VDC: Blue</li> <li>• Support LED indicator switch</li> </ul>
<b>ESD</b>	± 16kV Air, ± 16kV Contact
<b>Environmental</b>	<ul style="list-style-type: none"> <li>• Operating Temperature: -40 to 60 °C (-40 to 140 °F)</li> <li>• Storage Temperature: -40 to 70 °C (-40 to 158 °F)</li> <li>• Operating Humidity: Support IP66 waterproof</li> <li>• Storage Humidity: 10% to 95% Non-condensing</li> </ul>
<b>Dimensions (LxWxH)</b>	Unit: 210 x 150 x 52mm Package: 466 x 286 x 258mm
<b>Weight</b>	Unit: 0.75KG Entire Package :1.35 KG
<b>Package Content</b>	1x Switch, Rack-mounting Standard Brackets , 1x QIG,4x assembled screw, 4x expansion screw ,2 x Metal straps,1x Phoenix connector
<b>Compliance</b>	FCC, CE, RCM, IC

# GWN7710R PoE & VLAN Feature


1. The switch will maintain PoE power supply during the soft restart to ensure data such as camera feeds are not lost.
2. Real-time dynamic display and control of PoE power to detect anomalies in a timely manner.
3. PoE port supports dynamic configuration for non-standard 24VDC and 802.3af/at to ensure the compatibility with various APs and cameras.
4. Support PoE++ and DC input, suitable for solar and switch cascaded power supply.
5. Supports port VLAN and 802.1Q VLAN, allowing users to flexibly divide VLANs according to the requirements.

## Passive PoE output Mode

PINS	T568A Color	T568B Color	2-Pair	4-Pair
1	white/green stripe	white/orange stripe		DC +
2	green solid	orange solid		DC +
3	white/orange stripe	white/green stripe		DC -
4	blue solid	blue solid	DC +	DC +
5	white/blue stripe	white/blue stripe	DC +	DC +
6	orange solid	green solid		DC -
7	white/brown stripe	white/brown stripe	DC -	DC -
8	brown solid	brown solid	DC -	DC -

\*4-Pair: power on pins 1,2,4,5(+) 3,6,7,8(-)      \*2-Pair: power on pins 4,5(+) 7,8(-)


## Deployment Case: Solar DC + Fiber Optic Cable

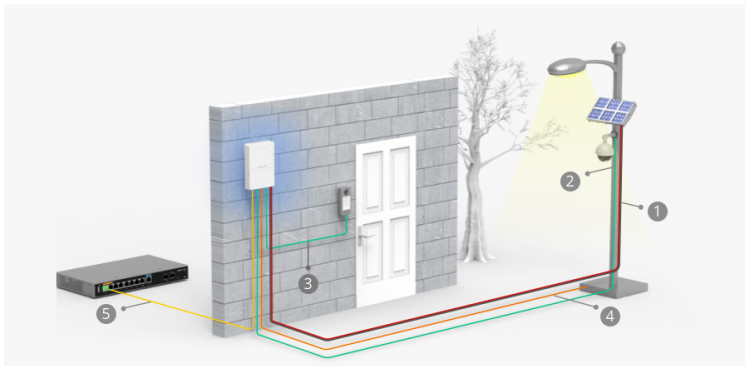

- Port 1:** 24/48V DC 4 Pair Passive PoE Camera
- Port 2:** 802.3af PoE IP Video Intercom System
- Port 3:** 24/48V DC IR LED Night Vision Lighting for Surveillance
- Port 6 (SFP):** SFP Optical Port
- DC Terminal:** Solar/Battery powered, 12-57V DC

- ① Solar/Battery DC Power Supply Cable
- ② ③ ④ Power over Ethernet Cable (PoE/Passive PoE 24V DC)
- ⑤ Optical Fiber for Long Distance Transmission

## Deployment Case: PoE++ RJ45 Power and Data

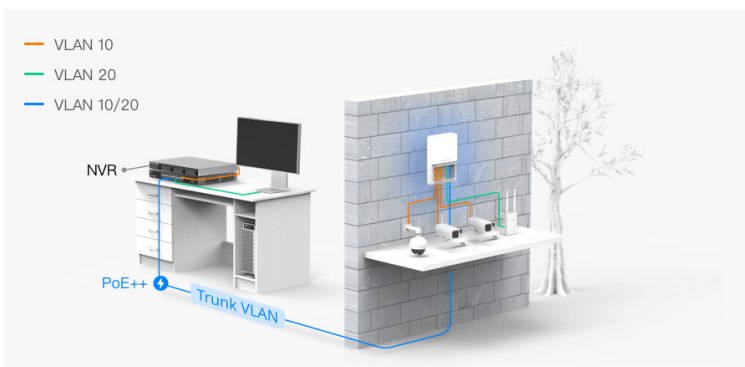

- Port 1:** 24V/48V DC 4 Pair Passive PoE Camera
- Port 2:** 24V DC 2 Pair Passive PoE Camera
- Port 3:** 802.3af PoE Camera
- Port 4:** Outdoor Wi-Fi AP GWN7630LR
- Port 5:** PoE++ RJ45 Input